



Filter Inductors – 1812FS Series



- Magnetically shielded chip inductors
- Provides high performance in transmit and receive filters
- 29 inductance values from 1.0 – 1000 μH

Core material Ceramic/Ferrite

Terminations RoHS compliant silver-palladium-platinum-glass frit. Other terminations available at additional cost.

Weight 0.33 – 0.36 g

Ambient temperature -40°C to $+85^{\circ}\text{C}$ with Irms current, $+85^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ with derated current

Storage temperature Component: -40°C to $+125^{\circ}\text{C}$.
Packaging: -55°C to $+80^{\circ}\text{C}$

Resistance to soldering heat Max three 40 second reflows at $+260^{\circ}\text{C}$, parts cooled to room temperature between cycles

Temperature Coefficient of Inductance (TCL) $+200$ to $+700$ ppm/ $^{\circ}\text{C}$

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at $<30^{\circ}\text{C}$ / 85% relative humidity)

Mean Time Between Failures (MTBF) 1 billion hours

Packaging 600/7" reel; 2200/13" reel. Plastic tape: 12 mm wide, 0.25 mm thick, 8 mm pocket spacing, 3.9 mm pocket depth

PCB washing Only pure water or alcohol recommended

Part number ¹	L ² (μH)	% ³ tol	Q ⁴ min	DCR ⁵ max (Ohms)	SRF ⁶ typ (MHz)	Isat ⁷ (mA)	Irms ⁸ (mA)
1812FS-102_L	1.0	10,5	30	0.070	320	3100	2950
1812FS-122_L	1.2	10,5	35	0.110	280	2800	2600
1812FS-152_L	1.5	10,5	20	0.105	200	2100	2850
1812FS-222_L	2.2	10,5	30	0.120	175	1800	2700
1812FS-242_L	2.4	10,5	25	0.175	160	1900	2050
1812FS-272_L	2.7	10,5	30	0.200	165	1400	2100
1812FS-332_L	3.3	10,5	33	0.185	160	1400	1900
1812FS-392_L	3.9	10,5	32	0.195	145	1300	1700
1812FS-472_L	4.7	10,5	28	0.15	125	1000	1800
1812FS-562_L	5.6	10,5	35	0.40	110	1000	1650
1812FS-682_L	6.8	10,5	35	0.35	110	850	1450
1812FS-103_L	10	10,5	35	0.55	90	710	1400
1812FS-153_L	15	10,5	40	0.75	75	680	1150
1812FS-223_L	22	10,5	45	0.85	15	600	855
1812FS-333_L	33	10,5	45	1.1	10	540	820
1812FS-393_L	39	10,5	45	1.1	9.8	500	710
1812FS-473_L	47	10,5	45	1.2	8.0	390	645
1812FS-683_L	68	10,5	45	1.8	22.0	260	650
1812FS-104_L	100	10,5	45	2.5	4.5	260	520
1812FS-154_L	150	10,5	40	3.8	3.4	220	475
1812FS-224_L	220	10,5	45	5.4	3.0	180	390
1812FS-274_L	270	10,5	35	6.5	2.0	150	350
1812FS-334_L	330	10,5	45	6.8	3.0	150	310
1812FS-394_L	390	10,5	35	7.6	2.6	140	310
1812FS-474_L	470	10,5	35	8.7	2.1	130	280
1812FS-564_L	560	10,5	20	11.2	1.60	110	280
1812FS-684_L	680	10,5	25	12.7	1.90	100	250
1812FS-824_L	820	10,5	25	16.8	1.45	90	210
1812FS-105_L	1000	10,5	30	19.5	1.68	90	160

1. When ordering, specify **tolerance, termination and packaging** codes:

1812FS-105J L C

Tolerance: J = 5% K = 10%

(Table shows stock tolerances in bold.)

Termination: L = Silver-palladium-platinum-glass frit terminations

Special order: T = RoHS tin-silver-copper (95.5/4/0.5)
or S = non-RoHS tin-lead (63/37).

Packaging: C = 7" machine-ready reel. EIA-481 embossed plastic tape (600 parts per full reel).

B = Less than full reel. On tape, but not machine ready.
To have a leader and a trailer added (\$25 charge),
use code letter C instead.

D = 13" machine-ready reel. EIA-481 embossed plastic tape (2200 parts per full reel).

- Inductance measured at 100 kHz, 0.1 Vrms, 0 Adc using a Coilcraft SMD-A fixture in an Agilent/HP 4263B impedance analyzer.
 - Tolerances in bold are stocked for immediate shipment.
 - Q measured at 1 MHz on an Agilent/HP 4291A with an Agilent/HP 16193 test fixture.
 - DCR measured on a micro-ohmmeter and a Coilcraft CCF840 test fixture.
 - SRF measured using an Agilent/HP 8753D network analyzer and a Coilcraft SMD-D test fixture.
 - DC current at which the inductance drops 10% (typ) from its value without current.
 - Current that causes a 40°C temperature rise from 25°C ambient.
 - Electrical specifications at 25°C .
- See Qualification Standards section for environmental and test data.
Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

Coilcraft®

Specifications subject to change without notice.
Please check our website for latest information.

Document 254-1 Revised 09/27/07


1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469

E-mail info@coilcraft.com Web http://www.coilcraft.com




Filter Inductors – 1812FS Series



Typical L vs Frequency

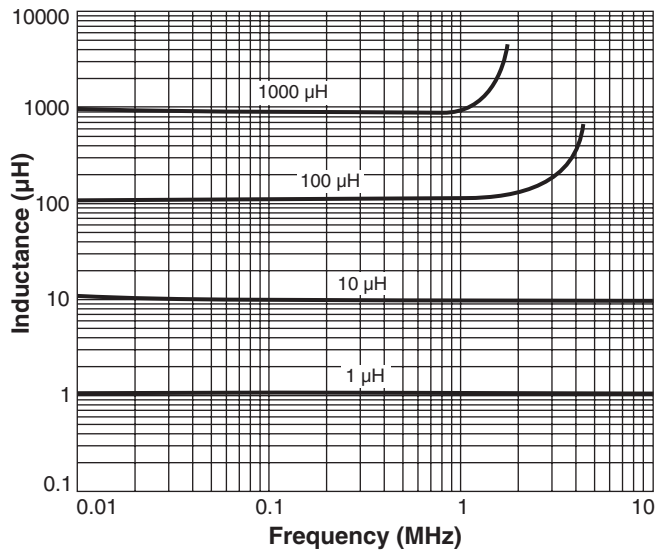

Typical L vs Current

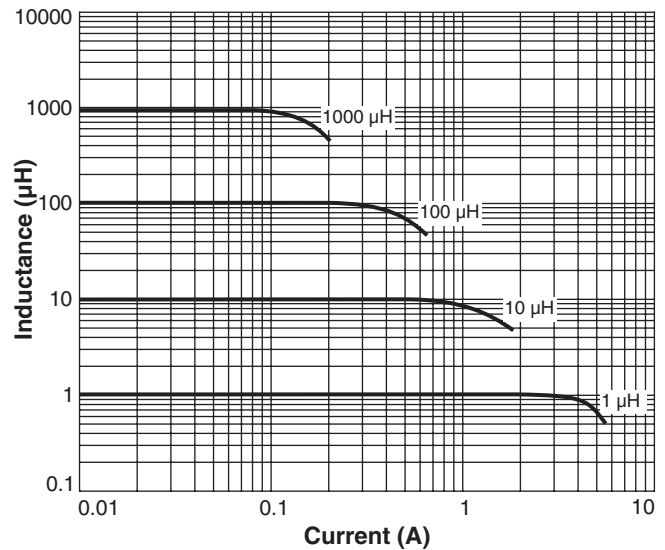

Irms Derating

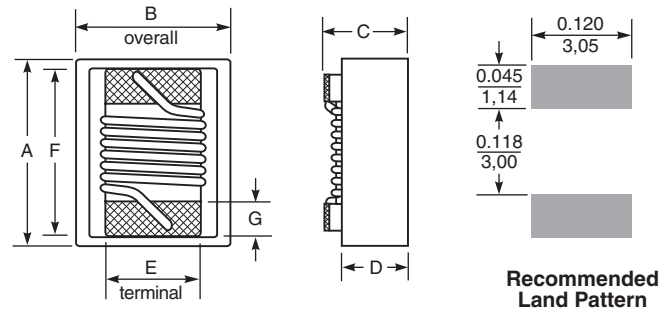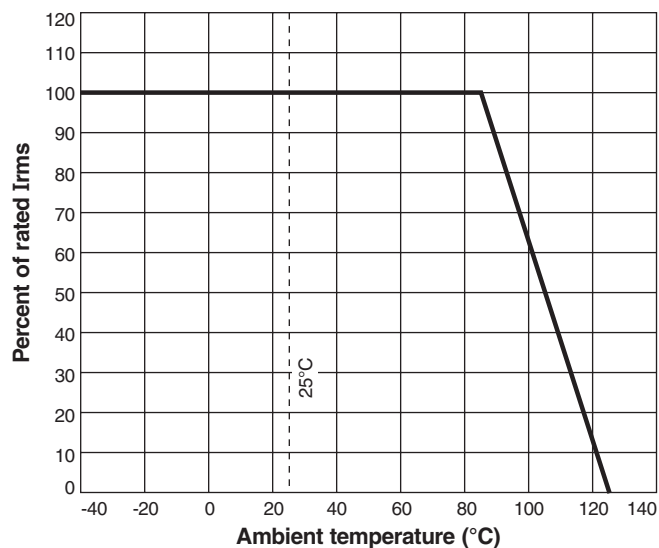

A max	B max	C max	D ref	E ref	F ref	G
0.231	0.196	0.150	0.107	0.100	0.178	0.025 inches
5,87	4,98	3,81	2,72	2,54	4,52	0,64 mm

Coilcraft®

Specifications subject to change without notice.
Please check our website for latest information.

Document 254-2 Revised 09/27/07

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469

E-mail info@coilcraft.com Web <http://www.coilcraft.com>