

Coaxial

Adapter, SMA-F to BNC-M

SF-BM50+

50Ω

DC to 2 GHz



CASE STYLE: DJ1023

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.

Features

- flat response
- excellent VSWR
- low cost adapters, available from stock
- brass body, nickel plated

Connectors	Model	Price	Qty.
Conn1 SMA-F	Conn2 BNC-M	SF-BM50+	\$3.95 ea. (1-49)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.


Applications

- interconnection of RF cables and equipment
- testing

Electrical Specifications T_{AMB}=25°C

FREQUENCY (GHz)	INSERTION LOSS (dB)	VSWR (:1) Max.
f _L -f _U	Typ.	DC-2 GHz
DC-2	0.05	1.20

Outline Drawing


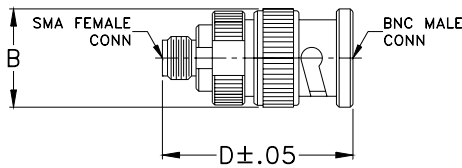


Outline Dimensions (inch/mm)

A	B	C	D	E	wt
--	.57	--	1.11	--	grams
--	14.48	--	28.19	--	13.3

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	
		SMA-F	BNC-M
1.00	0.00	1.00	1.00
10.00	0.01	1.00	1.00
20.00	0.01	1.01	1.01
40.00	0.01	1.01	1.01
50.00	0.02	1.01	1.01
60.00	0.02	1.01	1.01
70.00	0.02	1.01	1.01
80.00	0.02	1.01	1.01
90.00	0.02	1.02	1.01
100.00	0.02	1.02	1.01
200.00	0.03	1.03	1.02
400.00	0.04	1.04	1.02
600.00	0.05	1.05	1.03
800.00	0.06	1.06	1.03
1000.00	0.05	1.07	1.04
1200.00	0.06	1.09	1.04
1400.00	0.07	1.11	1.04
1600.00	0.07	1.11	1.04
1800.00	0.09	1.12	1.04
2000.00	0.08	1.12	1.03

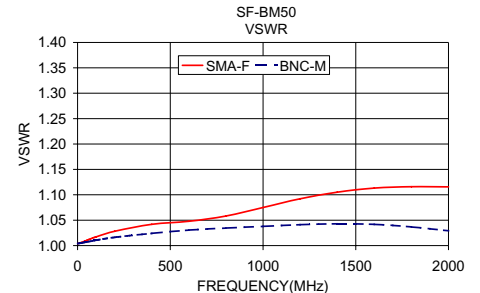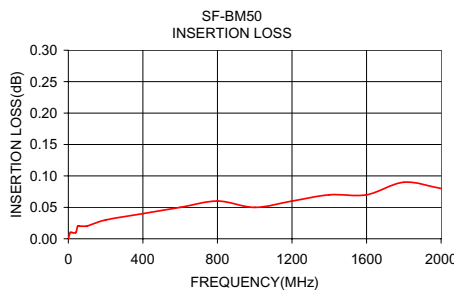

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS

REV. A
M98898
SF-BM50+
ED-11362/3
RS/TD/CP
081120