


NEW!

SMT Power Inductors – LPS5015 Series



- Very low DCR; excellent current handling
- 5.0 × 5.0 mm footprint; only 1.5 mm high



Designer's Kit C350 contains 3 each of all values

Core material Ferrite

Terminations RoHS compliant silver-palladium-platinum-glass frit. Other terminations available at additional cost.

Weight 102 – 107 mg

Ambient temperature –40°C to +85°C with Irms current, +85°C to +125°C with derated current

Storage temperature Component: –40°C to +125°C. Packaging: –55°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Mean Time Between Failures (MTBF) 26,315,789 hours

Packaging 1000/7" reel; 3500/13" reel Plastic tape: 12 mm wide, 0.3 mm thick, 8 mm pocket spacing, 1.57 mm pocket depth

PCB washing Only pure water or alcohol recommended

Part number ¹	Inductance ² ±20% (µH)	DCR max ³ (Ohms)	SRF typ ⁴ (MHz)	Isat (A) ⁵			Irms (A) ⁶	
				10% drop	20% drop	30% drop	20°C rise	40°C rise
LPS5015-102ML_	1.0	0.050	183	3.6	3.8	3.9	1.90	2.65
LPS5015-132ML_	1.3	0.065	150	2.5	2.6	2.8	1.70	2.35
LPS5015-182ML_	1.8	0.075	128	2.6	2.8	2.9	1.50	2.15
LPS5015-222ML_	2.2	0.090	116	2.4	2.6	2.7	1.40	2.00
LPS5015-332ML_	3.3	0.125	88	1.9	2.0	2.0	1.30	1.80
LPS5015-472ML_	4.7	0.150	73	1.6	1.7	1.8	1.20	1.62
LPS5015-562ML_	5.6	0.175	67	1.6	1.6	1.6	1.10	1.45
LPS5015-682ML_	6.8	0.225	57	1.3	1.4	1.5	0.90	1.25
LPS5015-822ML_	8.2	0.280	49	1.3	1.3	1.4	0.85	1.05
LPS5015-103ML_	10	0.300	44	1.2	1.3	1.3	0.80	0.95
LPS5015-123ML_	12	0.350	40	1.0	1.1	1.2	0.75	0.84
LPS5015-153ML_	15	0.360	38	0.80	0.84	0.86	0.73	0.84
LPS5015-183ML_	18	0.550	35	0.75	0.77	0.80	0.70	0.83
LPS5015-223ML_	22	0.675	31	0.70	0.73	0.75	0.60	0.82
LPS5015-333ML_	33	0.750	24	0.55	0.59	0.60	0.50	0.70
LPS5015-473ML_	47	1.00	18	0.46	0.48	0.49	0.45	0.57
LPS5015-563ML_	56	1.13	17	0.40	0.43	0.45	0.40	0.52
LPS5015-683ML_	68	1.45	15	0.33	0.38	0.39	0.35	0.47
LPS5015-104ML_	100	1.95	12	0.30	0.33	0.34	0.30	0.42
LPS5015-124ML_	120	2.50	10	0.25	0.28	0.30	0.27	0.37
LPS5015-154ML_	150	3.40	9.3	0.23	0.25	0.26	0.25	0.33
LPS5015-224ML_	220	4.50	7.3	0.20	0.21	0.22	0.22	0.29
LPS5015-334ML_	330	7.40	5.7	0.15	0.17	0.18	0.17	0.22
LPS5015-474ML_	470	7.50	4.9	0.12	0.12	0.13	0.16	0.21
LPS5015-564ML_	560	8.50	4.3	0.10	0.11	0.12	0.14	0.190
LPS5015-684ML_	680	10.6	4.0	0.10	0.11	0.11	0.13	0.175
LPS5015-105ML_	1000	15.0	3.2	0.080	0.090	0.093	0.10	0.150
LPS5015-155ML_	1500	25.0	2.5	0.080	0.086	0.088	0.090	0.140
LPS5015-185ML_	1800	28.0	2.2	0.078	0.083	0.086	0.085	0.130
LPS5015-225ML_	2200	36.0	2.1	0.072	0.078	0.080	0.080	0.120
LPS5015-335ML_	3300	55.0	1.7	0.064	0.072	0.076	0.075	0.115
LPS5015-475ML_	4700	80.0	1.4	0.062	0.069	0.072	0.070	0.110

1. Please specify **termination** and **packaging** codes:

LPS5015-335MLC

Termination: L = RoHS compliant silver-palladium-platinum-glass frit.

Special order:

T = RoHS tin-silver-copper (95.5/4/0.5)
or S = non-RoHS tin-lead (63/37).

Packaging: C = 7" machine-ready reel. EIA-481 embossed plastic tape 1000 parts per full reel).

B = Less than full reel. In tape, but not machine ready. To have a leader and trailer added (\$25 charge), use code letter C instead.

D = 13" machine-ready reel. EIA-481 embossed plastic tape. Factory order only, not stocked (3500 parts per full reel).

2. Inductance tested at 100 kHz, 0.1 Vrms using an Agilent/HP 4192A.

3. DCR measured on a micro-ohmmeter.

4. SRF measured using Agilent/HP 8753ES or equivalent.

5. DC current that causes the specified inductance drop from its value without current.

6. Current that causes the specified temperature rise from 25°C ambient.

7. Electrical specifications at 25°C.

See Qualification Standards section for environmental and test data.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

Specifications subject to change without notice.
Please check our website for latest information.

Document 585-1 Revised 09/11/07

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469


E-mail info@coilcraft.com Web <http://www.coilcraft.com>




NEW!

SMT Power Inductors – LPS5015 Series



Typical L vs Frequency

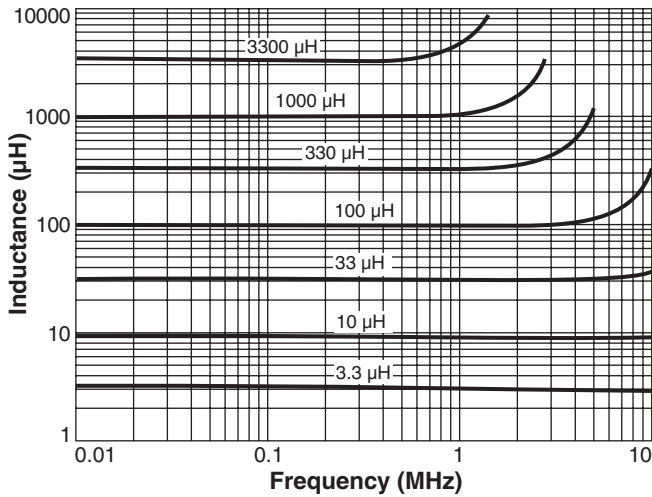

Typical L vs Current

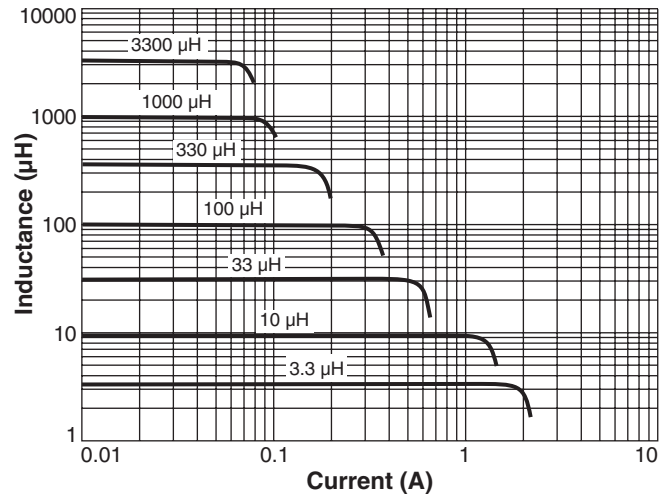

Typical Current Derating

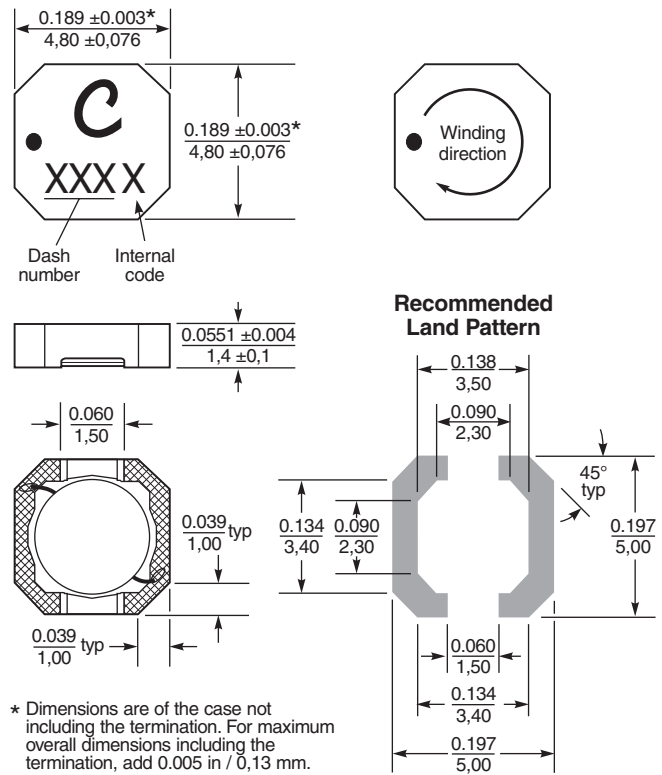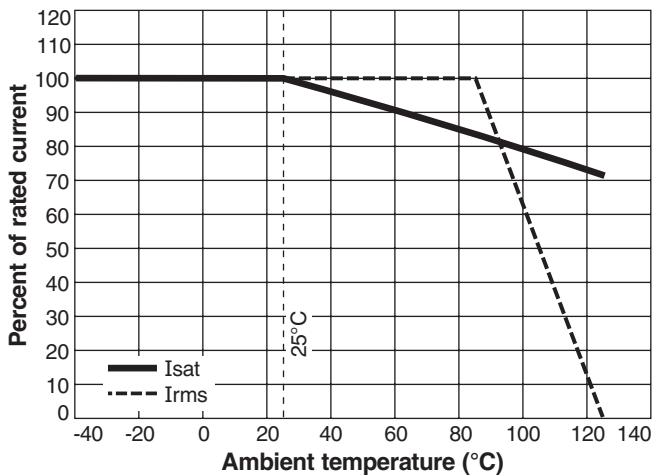

Dimensions are in $\frac{\text{inches}}{\text{mm}}$



Specifications subject to change without notice. Please check our website for latest information.

Document 585-2 Revised 09/11/07

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469

E-mail info@coilcraft.com Web <http://www.coilcraft.com>