


Surface Mount Power Splitter/Combiner

AD3PS-1+

3 Way-0° 50Ω 1 to 300 MHz



CASE STYLE: CJ725
PRICE: \$9.95 ea. QTY. (10-49)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	0.5W max.
Internal Dissipation	0.25W max.


Pin Connections

SUM PORT	1
PORT 1	8
PORT 2	5
PORT 3	4
GROUND	2,3,6,7

Outline Drawing

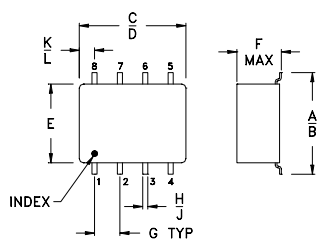

PCB Land Pattern




Suggested Layout,
Tolerance to be within ±0.02

Outline Dimensions (inch mm)

A	B	C	D	E	F	G
.345	.400	.385	.435	.310	.215	.100
8.76	10.16	9.78	11.05	7.87	5.46	2.54
H	J	K	L	M	N	P
.015	.025	.035	.075	.120	.060	.420
0.38	0.64	0.89	1.91	3.05	1.52	10.67
						wt grams
						0.45

Demo Board MCL P/N: TB-83 Suggested PCB Layout (PL-063)

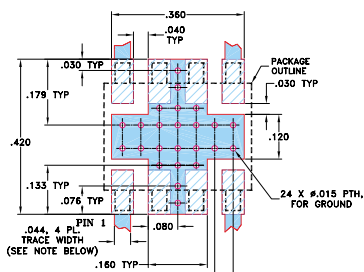

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- wideband, 1 to 300 MHz
- high isolation, 35 dB typ.
- good input port matching VSWR, 1.12 typ.
- good output port matching VSWR, 1.14 typ.
- small surface mount package

Applications

- VHF-TV
- aircraft communications




Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)			INSERTION LOSS (dB) ABOVE 4.8 dB			PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)								
	L	M	U	L	M	U	L	M	U	L	M	U						
f_L - f_U	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.						
1-300	40	23	35	20	27	18	0.3	0.8	0.4	1.0	0.8	1.5	1	4	6	0.2	0.3	0.5


L = 1-10 MHz M = 10-150 MHz U = 150-300 MHz

Typical Performance Data

Freq. (MHz)	Insertion Loss (dB)			Amp. Unbal. (dB)	Isolation (dB)			Phase Unbal. (deg.)	VSWR S	VSWR 1	VSWR 2	VSWR 3
	S-1	S-2	S-3		1-2	1-3	2-3					
1.00	5.15	5.16	5.17	0.01	36.32	40.91	35.31	0.04	1.10	1.24	1.26	1.25
4.00	5.05	5.06	5.06	0.01	42.83	45.40	44.11	0.04	1.04	1.13	1.13	1.13
7.00	5.05	5.06	5.06	0.01	43.56	45.44	46.46	0.09	1.04	1.11	1.12	1.12
10.00	5.06	5.06	5.06	0.01	43.53	45.25	46.58	0.11	1.04	1.11	1.11	1.11
20.00	5.08	5.08	5.09	0.01	42.24	43.79	43.05	0.16	1.04	1.10	1.10	1.11
40.00	5.11	5.12	5.12	0.00	38.90	40.37	37.60	0.35	1.06	1.10	1.10	1.10
60.00	5.14	5.14	5.15	0.01	36.16	37.63	34.33	0.51	1.08	1.10	1.11	1.11
100.00	5.21	5.20	5.21	0.00	32.45	33.97	30.23	0.89	1.12	1.11	1.12	1.12
120.00	5.24	5.24	5.23	0.01	31.12	32.66	28.79	1.05	1.14	1.11	1.12	1.12
200.00	5.42	5.40	5.39	0.03	27.39	29.05	24.87	1.69	1.21	1.14	1.16	1.15
220.00	5.47	5.44	5.42	0.05	26.68	28.34	24.14	1.84	1.23	1.15	1.17	1.16
240.00	5.54	5.50	5.48	0.06	25.96	27.65	23.43	1.93	1.25	1.15	1.18	1.17
260.00	5.63	5.57	5.55	0.08	25.24	26.92	22.74	2.15	1.27	1.16	1.19	1.18
280.00	5.71	5.65	5.63	0.09	24.50	26.14	22.04	2.25	1.29	1.18	1.21	1.19
300.00	5.82	5.74	5.71	0.11	23.71	25.31	21.33	2.39	1.31	1.19	1.23	1.21

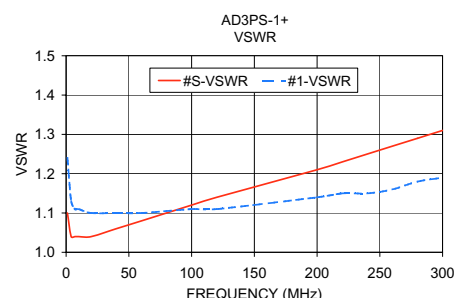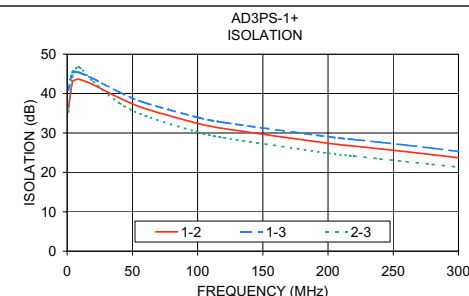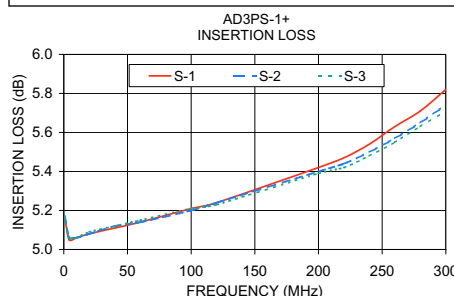

electrical schematic

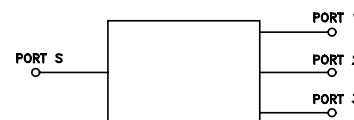

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

REV. G
M108294
ED-7781/1
AD3PS-1+
HY/TD/CP
080618