

X2 Frequency Multiplier

AMK-2-13+

50Ω Output 20 to 1000 MHz




Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Input Power	23 dBm


Pin Connections

INPUT	3
OUTPUT	6
GROUND	1,4,5
NOT USED	2

Outline Drawing

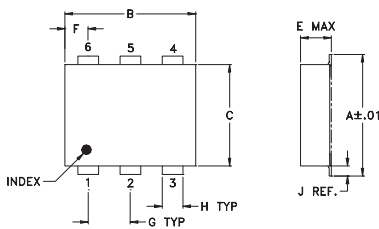

PCB Land Pattern




Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.272	.310	.220	.100	.112	.055	.100
6.91	7.87	5.59	2.54	2.84	1.40	2.54
H	J	K	L			wt
.030	.026	.065	.300			grams
0.76	0.66	1.65	7.62			0.20

Demo Board MCL P/N: TB-03 Suggested PCB Layout (PL-052)

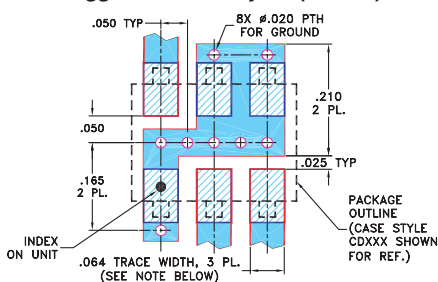

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 - ▨ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- broadband
- low conversion loss, 11.4 dB typ.
- high rejection F1 and F3, -45 dBc typ.
- low cost
- aqueous washable

Applications

- synthesizers
- local oscillators
- satellite up and down converters

CASE STYLE: CD542
PRICE: \$5.95 ea. QTY (10-49)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Electrical Specifications


MULTIPLICATION FACTOR	FREQUENCY (MHz)		INPUT POWER (dBm)		CONVERSION LOSS (dB)		*HARMONIC OUTPUT (dBc)					
	F1 Input	F2 Output	Min.	Max.	Typ.	Max.	F1		F3		F4	
2	10-500	20-1000	4	10	11.4	14.5	Typ.	Min.	Typ.	Min.	Typ.	Min.
					45	20	45	25	22	12		

* Harmonics of input frequency below the power level of F2


Typical Performance Data

Input Frequency (MHz)	INPUT RF= 4 dBm				INPUT RF= 10 dBm			
	Conversion Loss (dB) F2	Harmonic Output Below F2 (-dBc) F1	Harmonic Output Below F2 (-dBc) F3	Harmonic Output Below F2 (-dBc) F4	Conversion Loss (dB) F2	Harmonic Output Below F2 (-dBc) F1	Harmonic Output Below F2 (-dBc) F3	Harmonic Output Below F2 (-dBc) F4
10.00	11.14	45.65	50.28	15.24	11.61	54.24	65.09	21.97
60.00	11.14	48.90	66.44	15.25	11.94	50.38	65.74	21.45
100.00	11.22	45.52	65.65	15.06	11.70	46.86	61.85	20.36
150.00	11.22	43.05	59.50	14.95	11.67	43.30	55.49	20.72
200.00	11.31	40.43	53.67	15.06	11.67	41.16	50.45	22.99
250.00	11.23	37.72	49.84	15.65	11.72	38.29	47.40	25.43
300.00	11.15	36.08	47.09	16.63	11.69	36.49	44.07	30.03
350.00	11.09	34.61	45.52	18.06	11.88	34.46	41.61	31.49
400.00	10.99	32.56	42.50	19.34	11.97	33.87	39.61	36.48
450.00	11.16	31.45	43.20	20.09	12.21	32.85	39.01	25.48
500.00	11.41	29.56	43.75	20.71	12.72	33.56	39.13	25.56


AMK-2-13+ CONVERSION LOSS

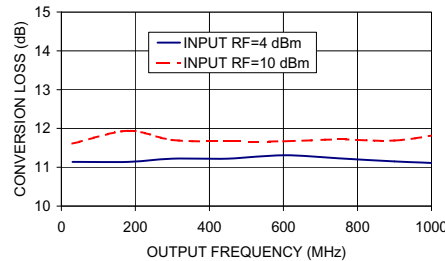


AMK-2-13+ HARMONIC OUTPUT F1

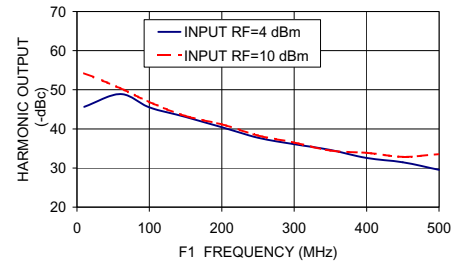

AMK-2-13+ HARMONIC OUTPUT F3

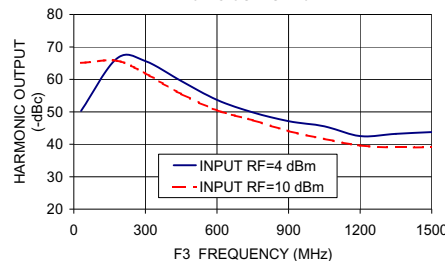

AMK-2-13+ HARMONIC OUTPUT F4

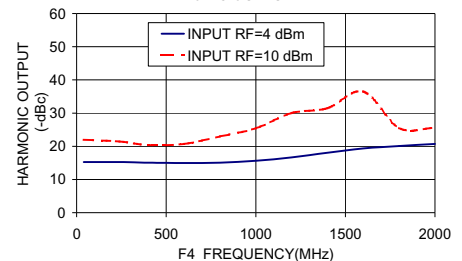

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS

REV. OR
M93911
AMK-2-13+
ED-11679/1
DJ/CP/AM
081229