

High Power Bi-Directional Coupler

50Ω 17dB Coupling DC Pass 824 to 2525 MHz

BDCN-17-25+
BDCN-17-25



Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
DC Current	0.5A
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

INPUT	1
OUTPUT	4
COUPLED (forward)	6
COUPLED (reverse)	3
GROUND	2,5

Features

- four-port coupler
- wideband, 824 to 2525 MHz
- excellent VSWR, 1.2:1 typ., all ports
- ultra small size, hermetically sealed
- minimal variation with temperature variation
- protected by US Patent 7,049,905
- DC current through input to output 0.5A Max. at 1.0 watt RF input power

Applications

- UMTS • CDMA
- PCS • ISM
- GPS • DCS
- TDMA

CASE STYLE: FV1206-1
PRICE: \$2.99 ea. QTY (10-49)
\$1.99 ea. QTY (1000)

**+ RoHS compliant in accordance
with EU Directive (2002/95/EC)**

The + suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Bi-Directional Coupler Electrical Specifications


FREQUENCY (MHz)	COUPLING (dB)		MAINLINE LOSS ¹ (dB)		DIRECTIVITY (dB)		VSWR (:1)	POWER INPUT ² (W)
	Nom.	Max. Flatness	Typ.	Max.	Typ.	Min.		
$f_c - f_u$								
824-2525	16.8±2.0	±3.0	0.6	0.9	13	10	1.2	16
824-894	18.3±0.6	±0.6	0.3	0.8	13	10	1.2	16
880-960	17.6±0.6	±0.6	0.3	0.8	13	10	1.2	16
1710-1880	14.3±0.6	±0.4	0.5	0.9	22	17	1.2	16
1850-1990	14.3±0.6	±0.4	0.5	0.9	22	17	1.2	16
2110-2170	14.3±0.6	±0.5	0.5	0.9	25	20	1.2	16
2375-2525	15.0±0.6	±0.8	0.5	0.9	15	11	1.2	16

1. Includes theoretical power loss of 0.1 dB at 17 dB coupling.
2. Derate linearly 8W at 100°C

Typical Performance Data

Frequency (MHz)	Mainline Loss (dB)		Coupling (dB)		Directivity (dB)		Return Loss (dB)			
	In-Out	In-Cpl Fwd	Out-Cpl Rev	Out-Cpl Fwd	In-Cpl Rev	In	Out	Cpl Fwd	Cpl Rev	
824.00	0.25	18.40	18.40	13.19	13.24	27.22	27.34	26.50	27.52	
1000.00	0.30	17.07	17.08	13.85	13.88	25.83	26.07	25.35	26.82	
1500.00	0.42	14.87	14.88	17.67	17.63	23.35	23.34	25.52	25.99	
1700.00	0.46	14.45	14.46	20.65	20.43	23.72	23.26	26.46	26.58	
1800.00	0.48	14.32	14.33	22.72	22.36	23.44	22.72	27.48	26.58	
1880.00	0.48	14.25	14.26	24.64	24.13	23.72	22.87	27.72	26.82	
2000.00	0.50	14.22	14.23	27.94	27.40	23.63	23.17	29.06	26.72	
2100.00	0.50	14.26	14.26	28.30	27.88	24.33	23.91	29.31	27.02	
2300.00	0.51	14.54	14.53	21.69	21.71	25.09	24.22	28.13	28.67	
2525.00	0.49	15.18	15.16	15.51	15.42	27.33	26.72	27.50	30.60	


Outline Drawing

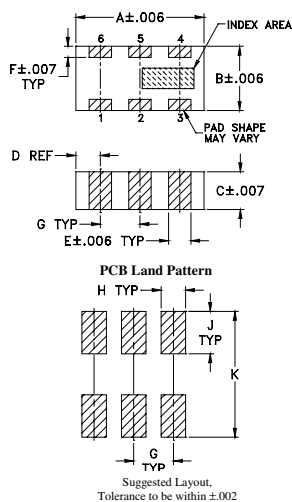




Outline Dimensions (inch/mm)

A	B	C	D	E	F
.126	.063	.035	.024	.022	.011
3.20	1.60	0.89	0.61	0.56	0.28
G	H	J	K		wt
.039	.024	.042	.123		grams
0.99	0.61	1.07	3.12		.020


Demo Board MCL P/N: TB-255+
Suggested PCB Layout (PL-131)



- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS 40350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

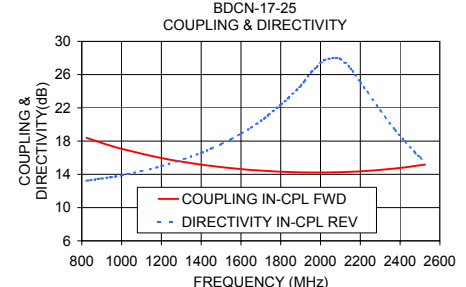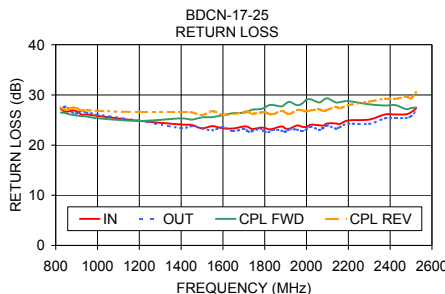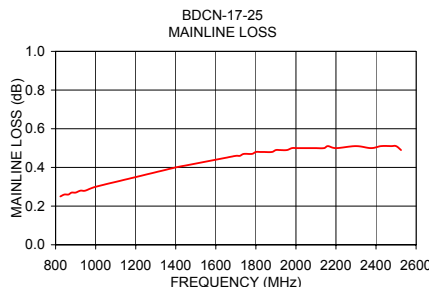

Electrical Schematic



Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS

REV. C
M119986
ED-10885/1
BDCN-17-25
AD/TD/CP/AM
081111