

Directional Couplers

DBTC-10-13+ DBTC-10-13L+

50Ω 10 dB coupling 5 to 1000 MHz

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C

Pin Connections


INPUT	3
OUTPUT	4
COUPLED	1
GROUND	2
ISOLATE (DO NOT USE)	6

Outline Drawing / Dimensions (inch)


AT790-1 (DBTC-10-13+)

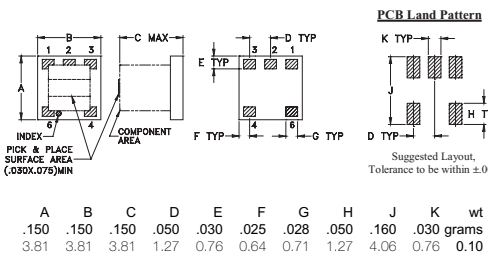

AT1030 (DBTC-10-13L+)

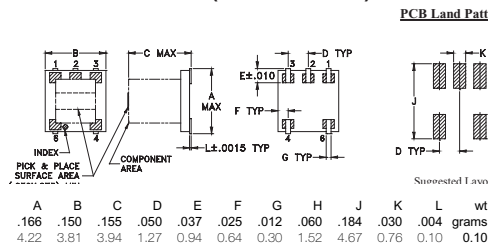

Demo Board MCL P/N: TB-278 Suggested PCB Layout (PL-150)



- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- very flat coupling
- very broadband, multi octave
- temperature stable, LTCC base
- all welded construction
- leads attached for better solderability
- micro miniature coupler
- aqueous washable
- protected by US Patents 6,140,887 & 6,784,521

Applications

- VHF/UHF receivers/transmitters
- cellular




Electrical Specifications

FREQ. RANGE (MHz)	COUPLING (dB)		MAINLINE LOSS* (dB)			DIRECTIVITY (dB)			VSWR** (:1)	POWER INPUT (W)							
	Nom.	Flatness	L	M	U	L	M	U		Typ.	L	MU					
f_L - f_U			Typ.	Max.	Typ.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Max.	Max.				
5-1000	10.3±0.5	±0.8	1.3	2.0	1.4	1.8	1.6	2.0	21	17	18	13	15	10	1.3	0.5	1.0


L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]
* Includes theoretical coupled power loss of 0.4 dB at 10 dB coupling
** For coupled port VSWR above 500 MHz, 1.6:1 typ.

Typical Performance Data

Frequency (MHz)	Mainline Loss (dB)		Coupling (dB)	Directivity (dB)	Return Loss (dB)	
	In-Out	In-Cpl			In	Out
5.00	1.39	9.98	22.65	17.72	24.12	25.96
10.00	1.31	9.96	22.50	18.66	28.97	28.11
50.00	1.30	9.99	22.49	19.21	35.99	29.42
100.00	1.31	10.02	22.25	19.27	34.22	28.89
300.00	1.35	10.11	21.18	18.61	28.51	26.63
500.00	1.38	10.19	19.67	17.76	25.67	23.15
600.00	1.40	10.25	19.22	17.56	24.97	21.33
800.00	1.44	10.48	17.51	17.17	23.59	17.92
900.00	1.46	10.63	16.49	17.08	23.03	16.39
1000.00	1.49	10.82	15.45	16.89	22.42	15.06

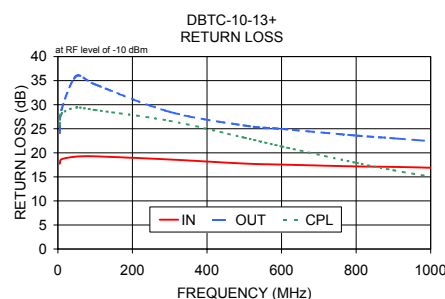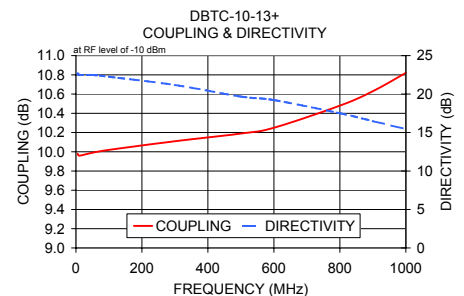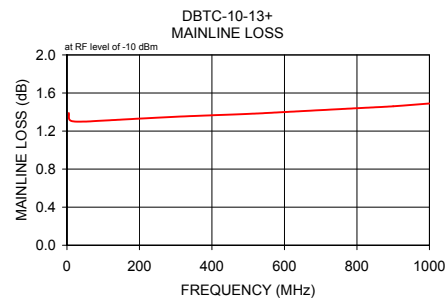

Electrical Schematic

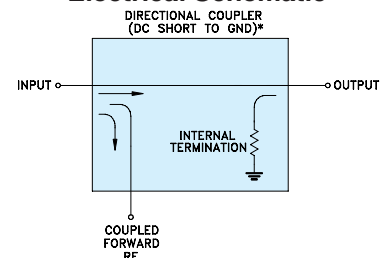

* ELECTRICAL SCHEMATIC IS FOR DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) THAT ROUTES DC FROM RF PORTS TO GROUND.

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS

REV. B
M119986
ED-12884/1
DBTC-10-13+_13L+
WZ/TD/CP/AM
081113