

Coaxial

Adapter, N-FEM to SMA-FEM

NF-SF50+

50Ω

DC to 18 GHz



CASE STYLE: DJ827

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Permanent damage may occur if any of these limits are exceeded.	

Features

- flat response
- excellent VSWR
- passivated stainless steel
- low cost adapters, available from stock

Connectors	Model	Price	Qty.
Conn1 N-FEM	Conn2 SMA-FEM NF-SF50+	\$22.95 ea.	(1-49)

Applications

- interconnection of RF cables and equipment


+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Electrical Specifications $T_{AMB}=25^{\circ}C$

FREQUENCY (GHz)	INSERTION LOSS (dB)	VSWR (:1) Max.		
		DC-8 GHz	DC-12.4 GHz	DC-18 GHz
f_L-f_U	Typ.			
DC-18	0.1	1.15	1.20	1.25

Outline Drawing


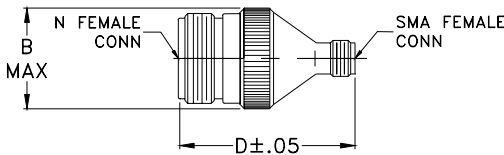


Outline Dimensions (inch/mm)

A	B	C	D	E	wt
--	.70	--	1.23	--	grams
--	17.78	--	31.24	--	26.0

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	
		N-FEM	SMA-FEM
10.00	0.01	1.00	1.00
50.00	0.01	1.00	1.00
100.00	0.01	1.00	1.00
500.00	0.02	1.00	1.01
1000.00	0.03	1.00	1.01
1500.00	0.04	1.01	1.01
2000.00	0.04	1.01	1.02
2500.00	0.05	1.02	1.03
3000.00	0.06	1.02	1.03
4000.00	0.07	1.02	1.03
5000.00	0.08	1.03	1.04
6000.00	0.09	1.06	1.04
9000.00	0.09	1.05	1.04
10000.00	0.11	1.00	1.05
12000.00	0.15	1.08	1.07
13000.00	0.14	1.10	1.10
14000.00	0.10	1.09	1.11
15000.00	0.11	1.04	1.05
17000.00	0.18	1.15	1.09
18000.00	0.18	1.21	1.21

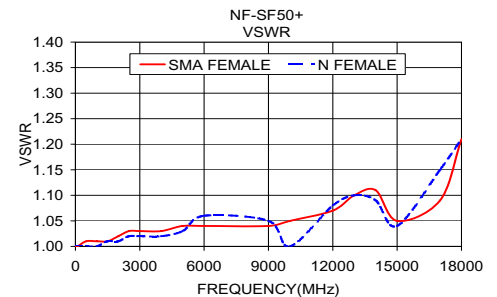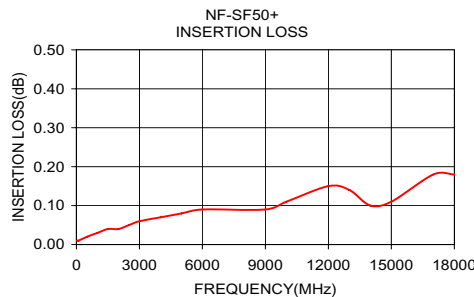

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site

Design Engine The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS

REV. D
M121747
NF-SF50+
EE-9107
RS/TD/CP/AM
090416