

Surface Mount Power Splitter/Combiner

SBA-2-14+ SBA-2-14

2 Way-0° 50Ω 1200 to 1600 MHz

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	2W max.
Internal Dissipation	0.125W max.

Permanent damage may occur if any of these limits are exceeded.


Pin Connections

SUM PORT	3
PORT 1	10
PORT 2	6
GROUND	1,2,4,5,7,8,9

Outline Drawing



PCB Land Pattern




Suggested Layout,
Tolerance to be within ±.002
ADJACENT GROUND PINS SHALL BE CONNECTED
TO EACH OTHER AND TO GROUND PAD

Outline Dimensions (inch mm)

A	B	C	D	E	F	G	H		
.250	.300	.070	.290	.050	.015	.050	.060		
6.35	7.62	1.78	7.37	1.27	0.38	1.27	1.52	wt	
J	K	L	M	N	P	Q	R		
.030	.080	.300	.100	.020	.015	.070	.014	grams	
0.76	2.03	7.62	2.54	0.51	0.38	1.78	0.36	0.3	

Demo Board MCL P/N: TB-95 Suggested PCB Layout (PL-070)

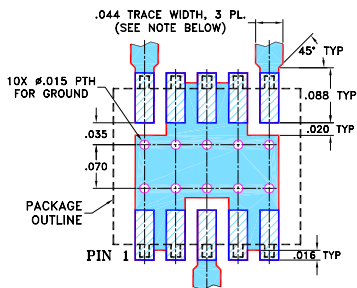

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" ± .0015"; COPPER 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- low insertion loss, 0.6 dB typ.
- minimal temperature variation
- very low amplitude unbalance, 0.25 dB typ.
- solder plated leads for excellent solderability and strain relief
- aqueous washable
- protected by U.S. Patent, 5,534,830

Applications




- GPS

Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) ABOVE 3.0 dB		PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)
	Typ.	Min	Typ.	Max.	Max.	Max.
f_c-f_u						
1200-1600	16	10	0.6	1.0	5.0	0.5

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
1200	3.34	3.55	0.20	14.29	2.17	1.67	1.21	1.21
1250	3.46	3.67	0.21	15.11	2.19	1.63	1.22	1.22
1275	3.50	3.71	0.21	15.51	2.33	1.61	1.23	1.23
1300	3.35	3.55	0.21	16.03	2.48	1.59	1.23	1.23
1325	3.38	3.59	0.20	16.62	2.47	1.57	1.24	1.24
1350	3.37	3.59	0.21	17.23	2.33	1.55	1.24	1.24
1375	3.33	3.55	0.22	17.69	2.46	1.53	1.24	1.25
1400	3.28	3.51	0.23	18.18	2.69	1.52	1.24	1.25
1425	3.35	3.57	0.22	18.71	2.71	1.50	1.25	1.25
1450	3.44	3.65	0.21	19.28	2.78	1.48	1.25	1.26
1475	3.37	3.58	0.21	19.93	2.73	1.45	1.25	1.26
1500	3.31	3.52	0.22	20.47	2.84	1.43	1.25	1.27
1525	3.29	3.51	0.22	20.91	2.92	1.42	1.25	1.27
1550	3.44	3.66	0.22	21.24	3.01	1.40	1.25	1.27
1600	3.26	3.48	0.22	21.86	3.13	1.38	1.24	1.27

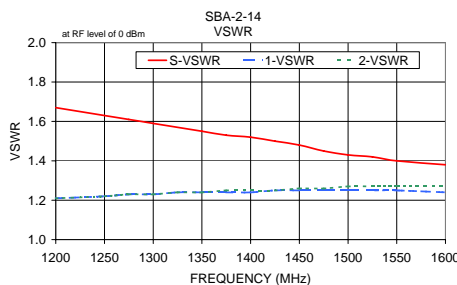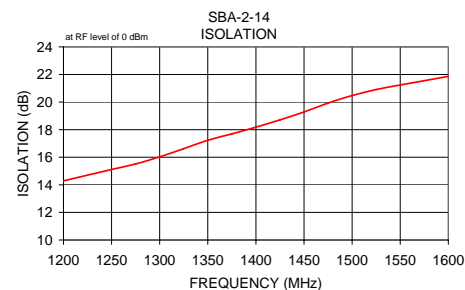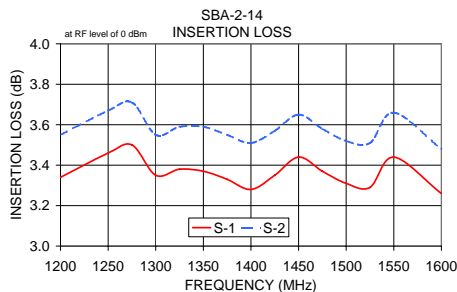

electrical schematic



CASE STYLE: SM1
PRICE: \$8.95 ea. QTY. (10-49)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site

IPC-122 The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS

REV. C
M102713
SBA-2-14
RD/TD/CP/AM
090128